



Products Show

Bead Wire



COMPANY PROFILE

YuSheng Enterprise Limited established in 2001, committed to rubber industry raw materials production and sales for more than 20 years.

After years of development, Yusheng has become a professional supplier of raw materials of rubber products, selling and serving tire and rubber products manufacturers in Europe, South America, Southeast Asia, India, Pakistan, the Middle East and other regions.

Yusheng is having more than 160+ stable and long-term manufacturing bases, which can provide one-stop raw material services for manufacturers in rubber industry. We sincerely invite rubber professionals from all over the world to join our global supply chain service system and become our partner to achieve win-win development.



Email: jonsen@yushengmax.com Mob.: +86 13963602511

Add.: 6F Dong Sheng Plaza Wei Fang City, Shan Dong Province, China.

Website: www.yushengmax.com

Bead Wire

Production Process




Bead Wire

Characteristics

- High tensile strength
- High toughness
- High fatigue resistance
- High flatness and adhesion
- High adhesion to rubber
- Important to ensure safety of vehicle

Applications

- Car tyres
- Engineering tyres
- Bicycle tyres
- Aircraft tyres
- Agricultural tyres

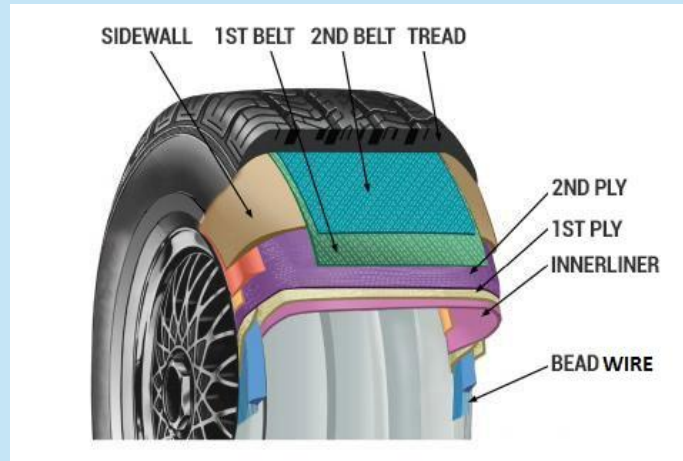

Email: jonsen@yushengmax.com Mob.: +86 13963602511

Add.: 6F Dong Sheng Plaza Wei Fang City, Shan Dong Province, China.

Website: www.yushengmax.com

Bead Wire

Specification:

Spec.	Tolerance mm	Breaking load N ≥	Elongation n ≥ %	Yield strength % ≥	Straightness mm/3m ≤	Torsion (Times/360°) ≥	Copper coating		
							Weight g/kg	Cu %	Sn %
φ0.89 mmNT	±0.02	1305	7	85	600	50(200d)	0.46±0.15	98±1	2±1
φ0.95 mmNT	±0.02	1350	7	85	600	50(200d)	0.43±0.15	98±1	2±1
φ0.95 mmHT	±0.02	1530	7	85	600	50(200mm)	0.43±0.15	98±1	2±1
φ0.96 mmNT	±0.02	1375	7	85	600	50(200d)	0.43±0.15	98±1	2±1
φ0.96 mmHT	±0.02	1540	7	85	600	50(200mm)	0.43±0.15	98±1	2±1
φ1.00 mmNT	±0.02	1450	7	85	600	25(100d)	0.41±0.14	98±1	2±1
φ1.00 mmHT	±0.02	1610	7	85	600	25(100d)	0.41±0.14	98±1	2±1
φ1.20 mmNT	±0.02	2090	7	85	600	25(100d)	0.34±0.12	98±1	2±1
φ1.20 mmHT	±0.02	2400	7	85	600	25(100d)	0.34±0.12	98±1	2±1
φ1.30 mmHT	±0.02	2800	7	85	600	40(200d)	0.32±0.11	98±1	2±1
φ1.55 mmNT	±0.02	3600	7	90	600	25(100d)	0.27±0.10	98±1	2±1

The other specification can be customized as per the customer's requirements.

Note: Special spec. can be customized by the requirement/sample from customers.

Email: jonsen@yushengmax.com Mob.: +86 13963602511

Addr.: 6F Dong Sheng Plaza Wei Fang City, Shan Dong Province, China.

Website: www.yushengmax.com

Bead Wire

Packing:

- Winding on spool or paper core
- Vacuum Packing



★ ★ 1 ★ ★



★ ★ 2 ★ ★



★ ★ 3 ★ ★



Trustworthy Partner of Rubber Raw Materials

Email: jonsen@yushengmax.com Mob.:+86 13963602511

Add.: 6F Dong Sheng Plaza Wei Fang City, Shan Dong Province, China.

Website: www.yushengmax.com